Adamović Global DOO
Novi Sad
Rodoljuba Čolakovića 6A
021/400-521
adamovic.global@gmail.com

ledrasveta.org

Decorative facade lighting

The exterior linear washers constructed with a robust outdoor-rated housing. The exterior linear fixtures provide high output and available in cove and graze light versions. They feature superb color mixing and a uniform light distribution at a beam angle suitable for a wide range of indirect lighting applications. Such as cove lighting in ceilings, decorative wall lighting and other structures.

Model	AG-Y107
Wattage	18W 24W
Voltage	DC24V
Light Source	CREE OSRAM
Control	DMX DALI ON/OFF
Material	Anodic oxidation 6063 extruded aluminium with tempered glass
IP rating	IP67
IK rating	IK09
Operating temperature	-30°C - 45°C
Accessories	Adjustable mounting brackets
Output efficiency	<80 lm/W
Degree	10° 15° 30° 45° 60°

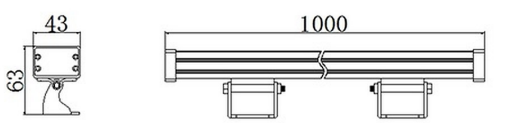

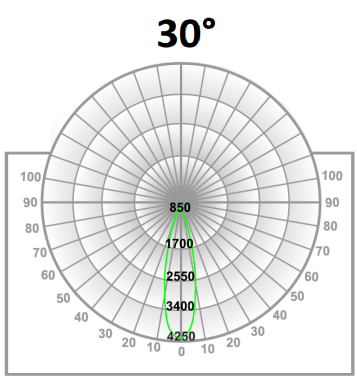

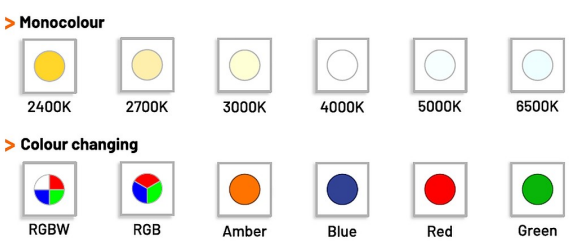

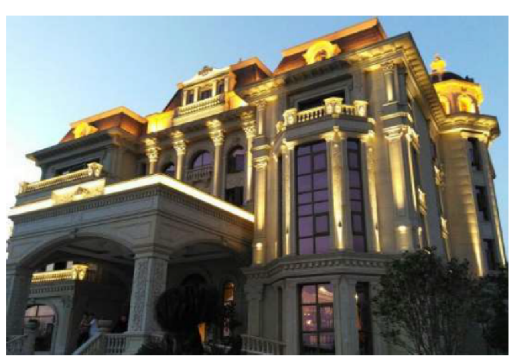

Adamović Global DOO
Novi Sad
Rodoljuba Čolakovića 6A
021/400-521
adamovic.global@gmail.com

ledrasveta.org

Featuring superior LED technology outdoor spotlight is a pioneer in contemporary facade lighting. An ideal solution for illuminating facades from various distance and for highlighting details. Facade lighting solutions shape a building's architecture and accentuate details by directing light very precisely. An intelligent resource-saving combination of facade lighting meets functional and aesthetic requirements, creates new urban spaces and lends a unique quality to architectural at night.

Model	AG-Y205A
Wattage	6W
Voltage	AC220V/DC24V
Light Source	CREE OSRAM
Control	DALI ON/OFF
Material	Anodic oxidation 6063 extruded aluminium with tempered glass
IP rating	IP67
IK rating	IK08
Operating temperature	-40°C - 50°C
Accessories	Adjustable mounting brackets
Output efficiency	<80 lm/W
Degree	15° 30° 45° 60°

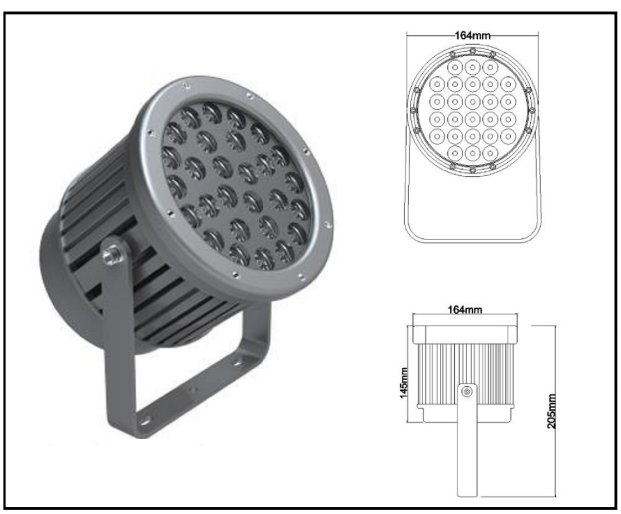

Model	AG-Y209A
Wattage	18W 36W
Voltage	DC24V
Light Source	CREE OSRAM
Control	DMX DALI ON/OFF
Material	Anodic oxidation 6063 extruded aluminium with tempered glass
IP rating	IP67
IK rating	IK08
Operating temperature	-40°C - 50°C
Accessories	Adjustable mounting brackets
Output efficiency	<80 lm/W
Degree	15° 30° 45° 60°

Adamović Global DOO
Novi Sad
Rodoljuba Čolakovića 6A
021/400-521
adamovic.global@gmail.com

ledrasveta.org

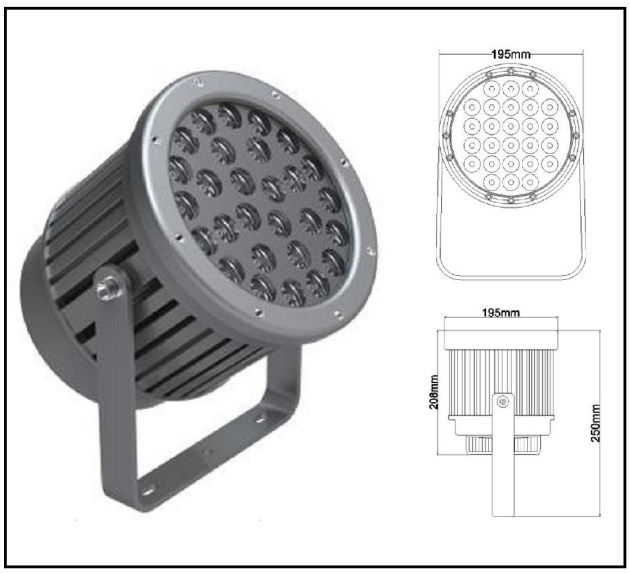

Model	AG-Y209B
Wattage	28W 56W
Voltage	DC24V
Light Source	CREE OSRAM
Control	DMX DALI ON/OFF
Material	Anodic oxidation 6063 extruded aluminium with tempered glass
IP rating	IP67
IK rating	IK08
Operating temperature	-40°C - 50°C
Accessories	Adjustable mounting brackets
Output efficiency	<80 lm/W
Degree	15° 30° 45° 60°

> Monocolour

2400K 2700K 3000K 4000K 5000K 6500K

> Colour changing

RGBW RGB Amber Blue Red Green

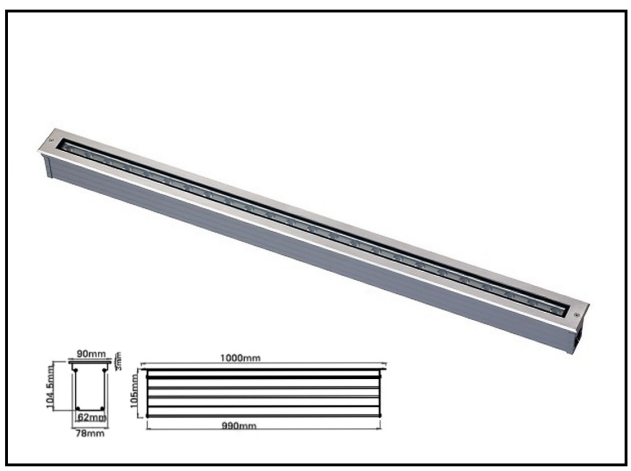
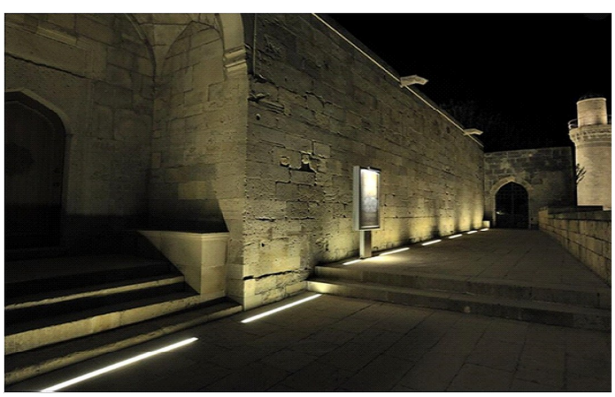
Model	AG-Y305D
Wattage	18W 24W 36W
Voltage	DC24V
Light Source	CREE OSRAM
Control	DMX DALI ON/OFF
Material	Anodic oxidation 6063 extruded aluminium with tempered glass
IP rating	IP67
IK rating	IK09
Operating temperature	-30°C - 45°C
Accessories	Adjustable mounting brackets
Output efficiency	<80 lm/W
Degree	15° 30° 45° 60°