
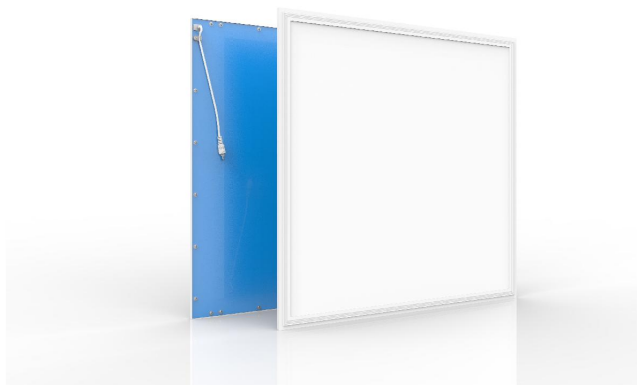


LED PANELI				
Model	AG-PLE303012	AG-PLE301225	AG-PLE606025	AG-PLE601245
Snaga	12W	25W	25W	45W
Dimenzije	295mm x 295mm	295mm x 1195mm	595mm x 595mm	595mm x 1195mm
Izvor svetlosti	SMD2835 LED	SMD2835 LED	SMD2835 LED	SMD2835 LED
Napon	220-240V	220-240V	220-240V	220-240V
Efikasnost	150lm/W / 140lm/W	150lm/W / 140lm/W	150lm/W / 140lm/W	150lm/W / 140lm/W
Drajver	ZFEI POWER flicker free	ZFEI POWER flicker free	ZFEI POWER flicker free	ZFEI POWER flicker free
Indeks boje	>80	>80	>80	>80
Faktor snage	>0.9	>0.9	>0.9	>0.9
Radna temperatura	-10 ~ +40°C	-10 ~ +40°C	-10 ~ +40°C	-10 ~ +40°C
Temperatura boje	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Garancija	5 godina	5 godina	5 godina	5 godina

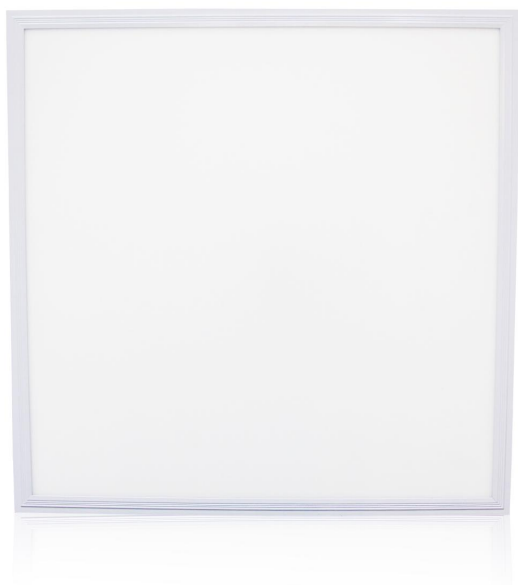

**Installation way 1: Jump Ring**




Image1



Image2




Image3




Image4

**Installation way 2: Mounting**




Image1




Image2




Image3




Image4

**Installation way 3: N-built**



Image1



Image2



Image3




Image4

**Installation way 4: Suspending**




Image1



Image2



Image3




Image4

**Installation way 5: Reverse buckling**




Image1



Image2





Image3




Image4

## AG-PLE606025

### Spectral Power Distribution & Chromaticity Diagram

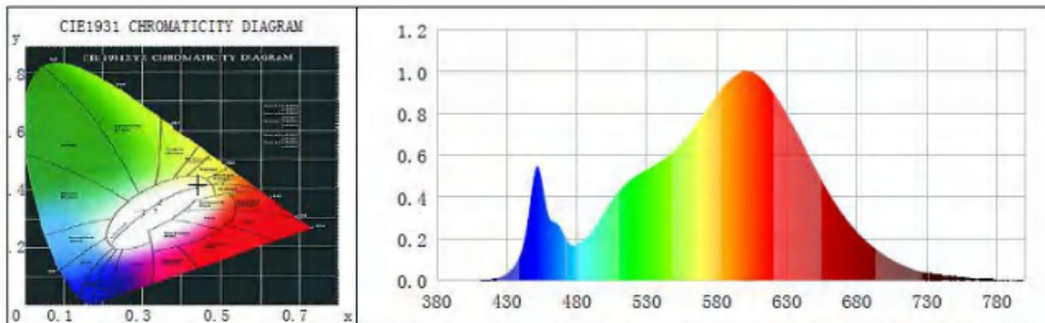


### Photometric Data

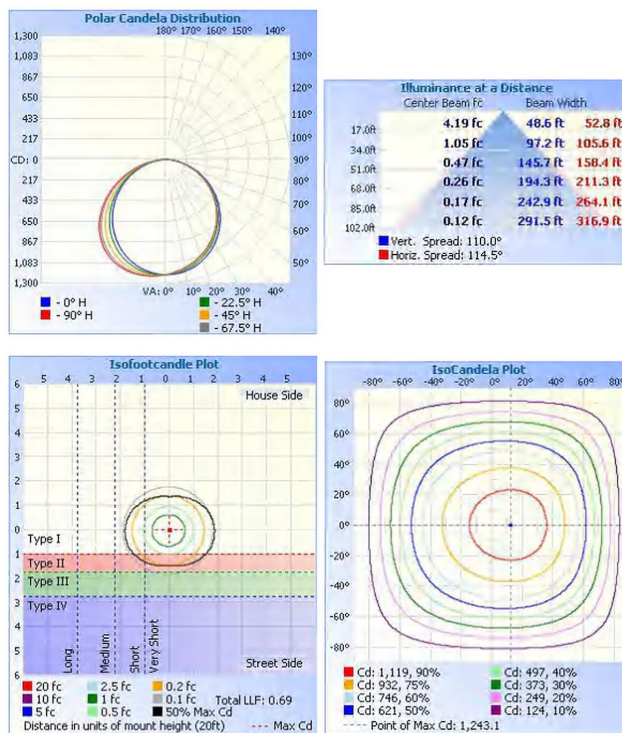


## AG-PLE301225

### Spectral Power Distribution & Chromaticity Diagram

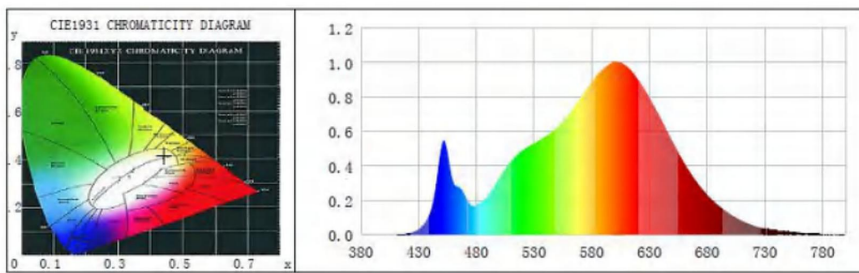

### Photometric Data

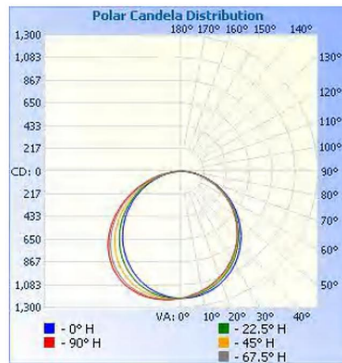

Center Beam Hc	Beam Width	
	48.6 ft	52.8 ft
17.0 ft	4.19 fc	5.28 ft
34.0 ft	1.05 fc	10.56 ft
51.0 ft	0.47 fc	15.84 ft
68.0 ft	0.26 fc	21.13 ft
85.0 ft	0.17 fc	26.41 ft
102.0 ft	0.12 fc	31.69 ft

Vert. Spread: 110.0°  
 Horiz. Spread: 114.5°

